




Suction capacity

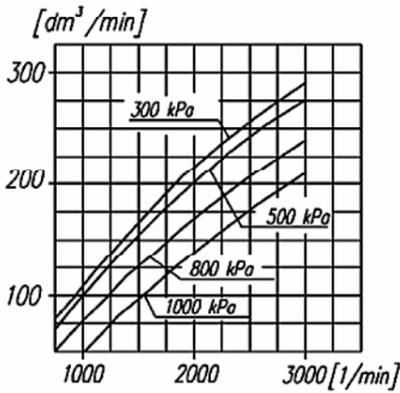


Power consumption

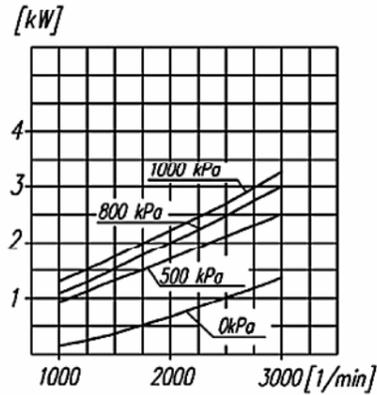

Time to fill a tank of 40dm³ capacity

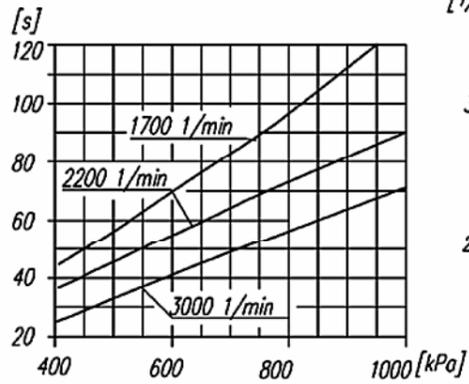

Max. r.p.m. for continuous duty

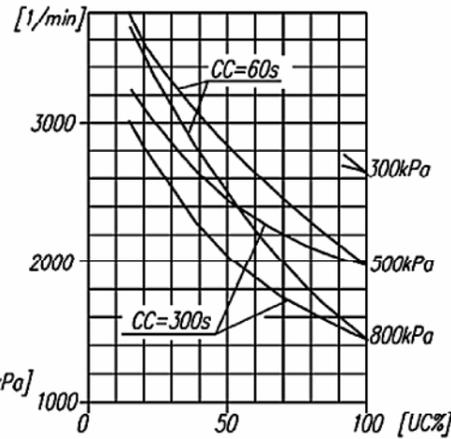

NOTE! The above characteristics are for open-inlet-valve control system at minimum cooling requirements and at ambient temperature +20°C

DEFINITIONS: CC=CT+CL - period of average operating cycle


$UC = \frac{CT}{CC} \times 100\%$ - percent ratio of compressor full load operating time in average operating cycle (also called percent duty cycle)
 CL - compressor no-load operating time (exhaust to the atmosphere)
 CT - compressor full load operating time

TECHNICAL DATA:

Number of cylinders 1
 Cylinder diameter 75 mm
 Piston stroke 36 mm
 Total piston displacement 159 cm³
 Mass 10 kg
 Working pressure 1000 kPa
 Max. pressure for short time duty 1100 kPa
 Max. allowable temp. of compressed air +220 °C
 Cooling by inflation of air, with the speed of the stream min. 6 m/s
 Lubrication forced circulation, splash lubrication
 min. pressure of oil 300±200 kPa
 (The pressure drop down is allowed to min. 60 kPa during the idle running of the heated up engine)

SYMBOLS DESCRIPTION:

0 - suction connection
 2 - discharge connection
 81 - lubricating oil inlet
 82 - lubricating oil outlet and crankcase breathing
 Numeral signs according to International Standard ISO-6786
 T - rating plate
 * - max. angular deflection of the compressor

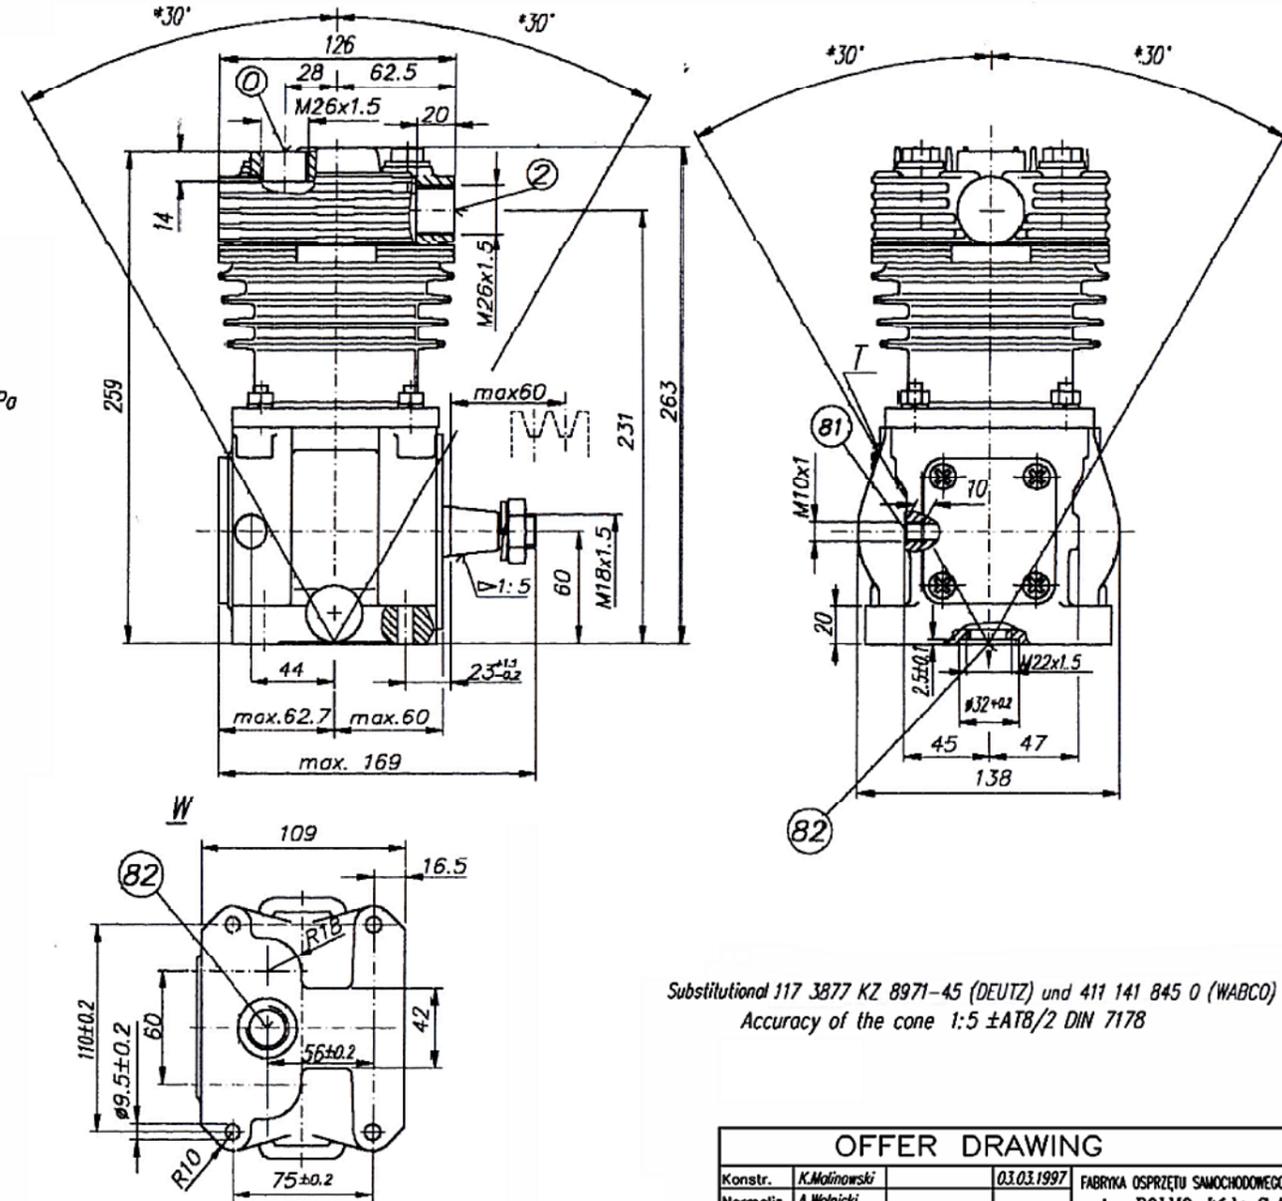

Substitutional 117 3877 KZ 8971-45 (DEUTZ) und 411 141 845 0 (WABCO)
 Accuracy of the cone 1:5 ±AT8/2 DIN 7178

GENERAL TOLERANCES				
CLASS	RANGE OF NOMINAL DIMENSIONS (±)MM			
	≤50	>50 ≤180	>180 ≤400	≥400
II	1.0	2.0	3.0	4.0

FORCE, POWER PRESSURE ETC. ±3*

OFFER DRAWING			
Konstr.	K.Malinowski	03.03.1997	FABRYKA OSPRZETU SAMOCHODOWEGO
Normaliz.	A.Walicki		POLMO-Łódź S.A. Dział Konstrukcji
Sprawdzit	W.Lesiak		
Zatwierdził	W.Lesiak		
Podziałka	Nazwa		
1:2.5	Compressor 601.09.923		