


TECHNICAL DATA:


Number of cylinders 1
 Cylinder diameter 65 mm
 Piston stroke 23 mm
 Total piston displacement 76 cm³
 Mass 6.5 kg
 Self-stabilizing pressure 1200⁺²⁰⁰/₋₁₀₀ kPa
 Max. allowable temp. of compressed air +220 °C
 Cooling by inflation of air, with the speed of the stream min. 6 m/s
 Lubrication forced circulation, splash lubrication
 min. pressure of oil 200 kPa

SYMBOLS DESCRIPTION:

0 - suction connection
 2 - discharge connection
 81 - lubricating oil inlet
 82 - lubricating oil outlet and crankcase breathing
 Numerical signs according to International Standard ISO-6786
 T - rating plate
 * - max. angular deflection of the compressor

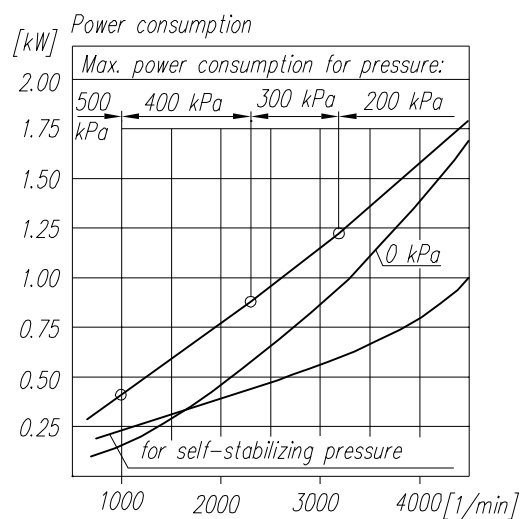

NOTE! The above characteristics are for open-inlet-valve control system at minimum cooling requirements and at ambient temperature +20°C

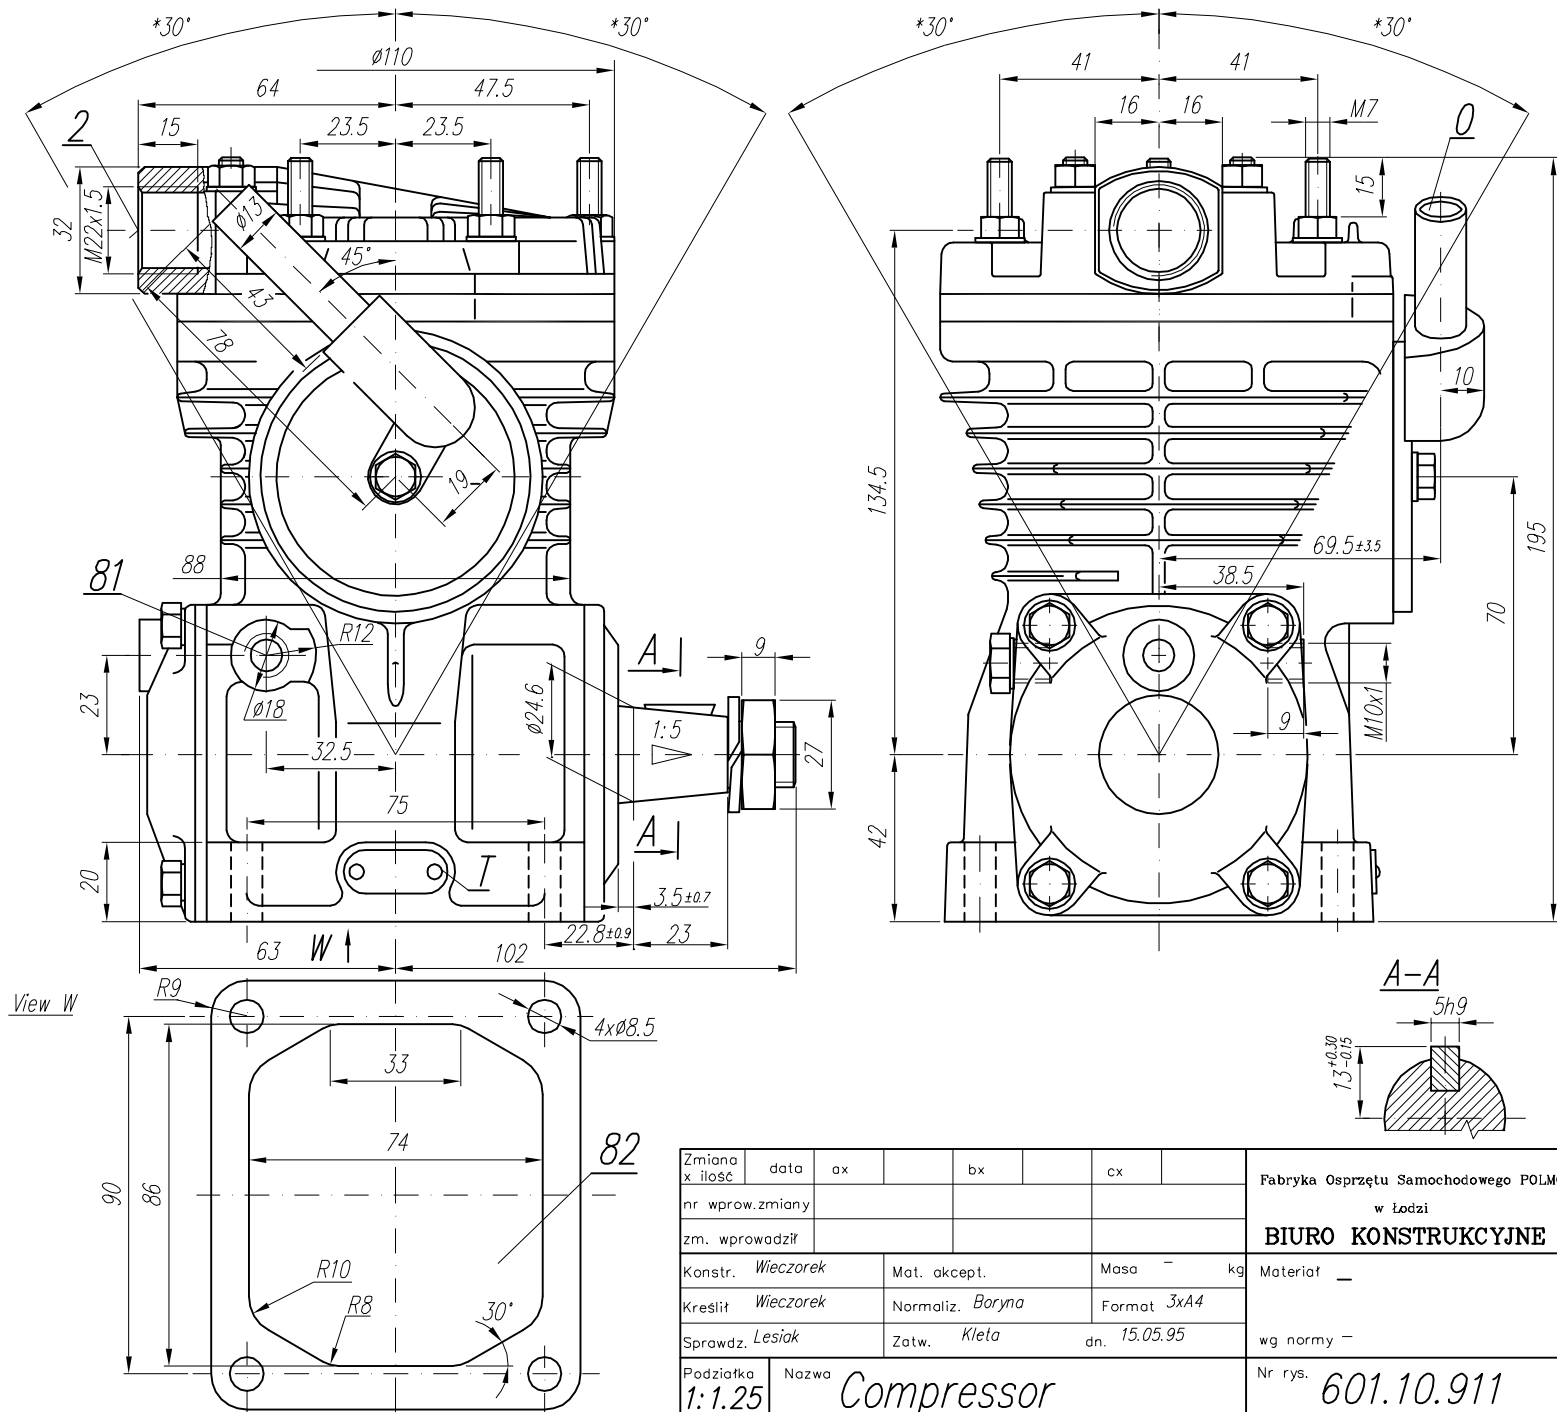

Zmiana x ilość	data	ax	bx	cx	Fabryka Osprzętu Samochodowego POLMO
nr. wprowadz. zmiany					w Łodzi
zm. wprowadził					BIURO KONSTRUKCYJNE
Konstr. <i>Wieczorek</i>	Mat. akcept.	Masa	kg	Materiał	
Kreślił <i>Wieczorek</i>	Normaliz. <i>Baryna</i>	Format	3x A4		
Sprawdz. <i>Lesiak</i>	Zatw. <i>Klela</i>	dn.	15.05.95	wg normy	
Podziałka	Nazwa	Compressor			Nr rys.
1:1.25					601.10.911