




Suction capacity

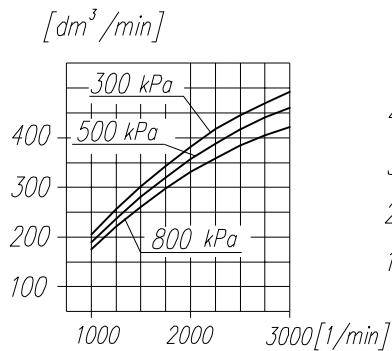


Power consumption

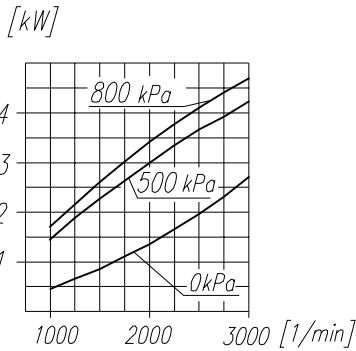

Time to fill a tank of 40 dm³ volume

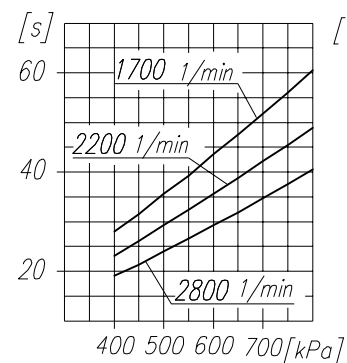

Max. r.p.m. for continuous duty

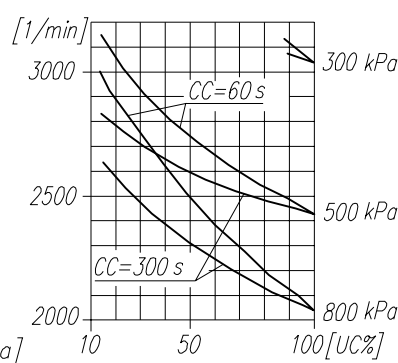

**NOTE!** The above characteristics are for open air suction system at ambient temperature +20°C and for cooling with fan

**DEFINITIONS:**  $CC=CT+CL$  - period of compressor average operating cycle

$UC = \frac{CT}{CC} \times 100\%$  - percentage fraction of loaded compressor operating time in average operating cycle

CL - compressor no-load operating time (free blow-out to atmosphere)



CT - loaded compressor operating time

**TECHNICAL DATA:**

- Number of cylinders 1
- Cylinder diameter 90 mm
- Piston stroke 46 mm
- Total piston displacement 293  $\text{cm}^3$
- Mass 12.5 kg
- Working pressure 800 kPa
- Max. pressure for short-time load 1000 kPa
- Max. allowable temp. of compressed air +220 °C
- Cooling by circuit of the water min. flow 2  $\text{dm}^3/\text{min}$
- temp. of water at the inlet max. +85 °C
- Lubrication: forced circulation, splash lubrication at min. pressure of 200 kPa

**SYMBOL DESCRIPTION:**

- 0 - suction end (thread M26x1.5 length 16 mm)
- 2 - discharge end (thread M26x1.5 length 16 mm)
- 81 - lubricating oil inlet (thread M10x1 length 10 mm)
- 82 - lubricating oil outlet and crankcase breathing (thread M22x1.5 length 10 mm)
- 91 - cooling water inlet (thread M22x1.5 length min. 14 mm)
- 92 - cooling water outlet (thread M22x1.5 length min. 14 mm)
- T - rating plate
- \* - max. angular tilt of the compressor

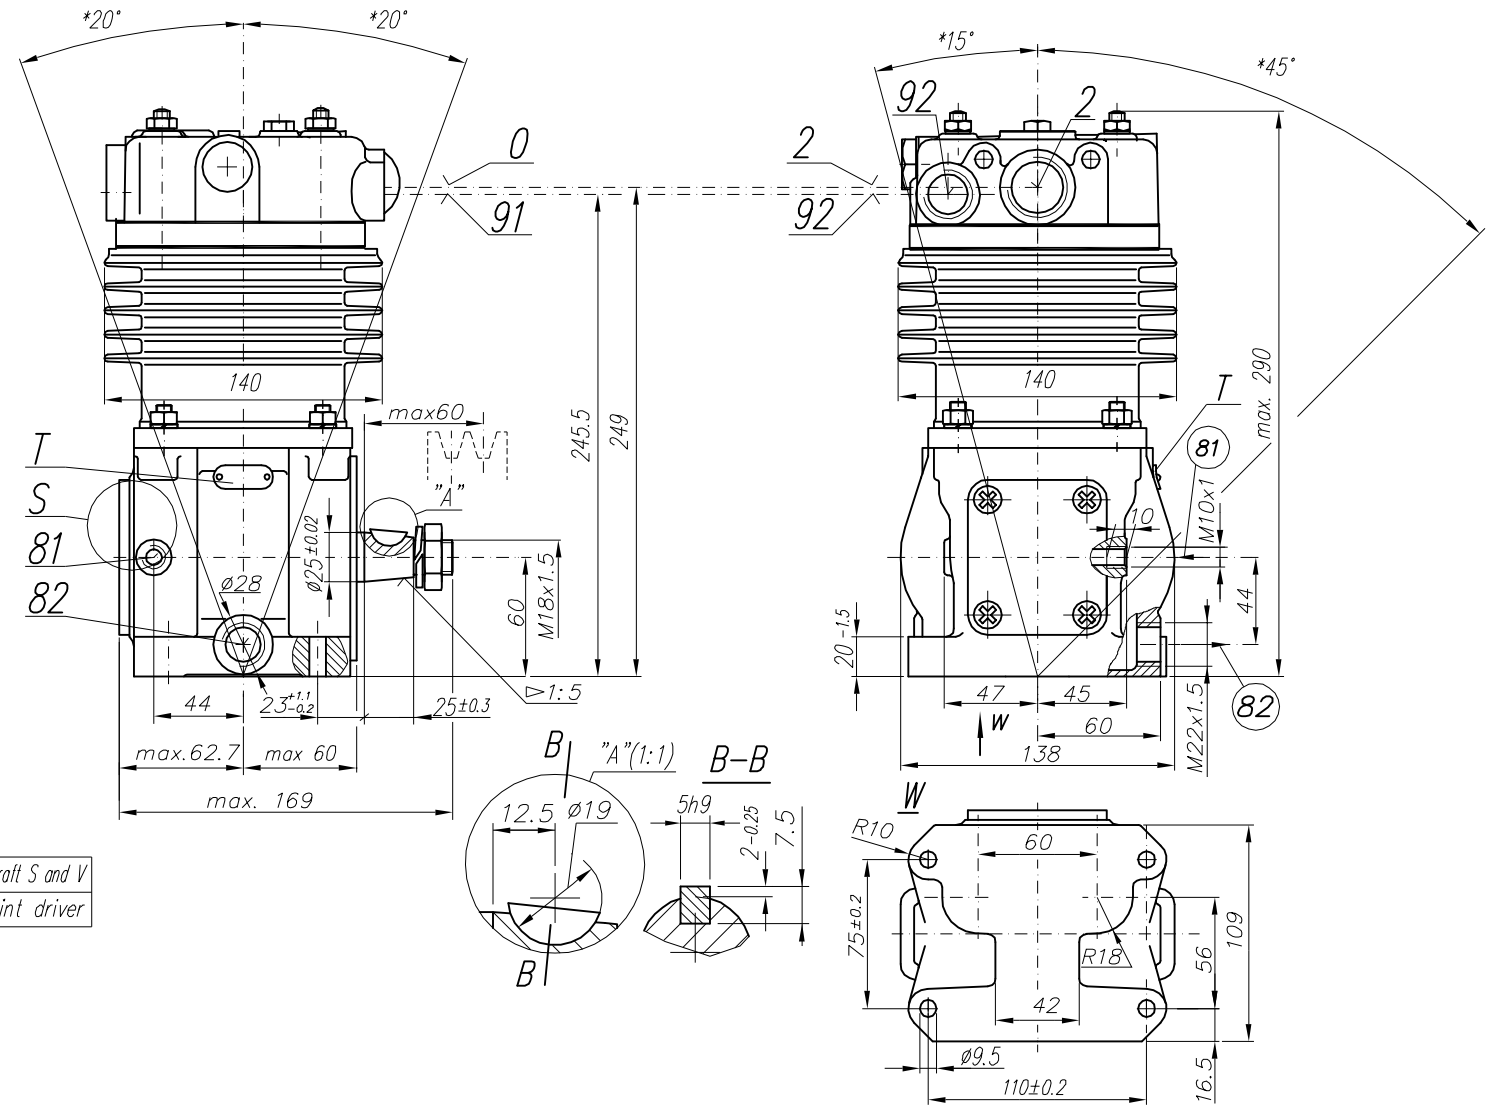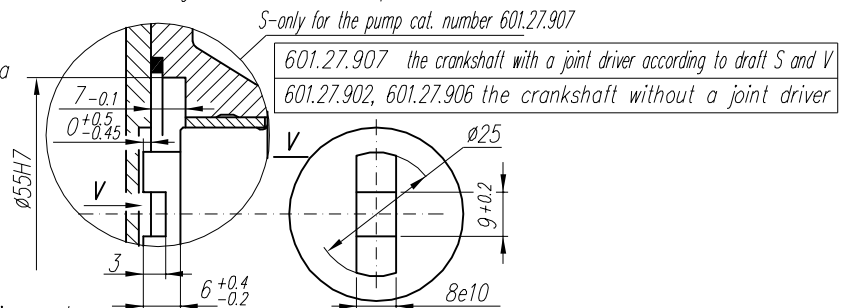

ASSEMBLING VARIANTS	SKETCH
601.27.902	
601.27.907	
601.27.906	

Zmiana x ilość	data	ax	bx	cx	Fabryka Osprzętu Samochodowego POLMO w Łodzi
nr. wprowadz. zmiany					BIURO KONSTRUKCYJNE
zm. wprowadził					Materiał
Konstr. Falba	Mat. akcept.	Masa	kg		
Kreślił Pluta	Normaliz. Boryna	Format 3x44			
Sprawdz. Lesiak	Zatw. Lach	dn. 3.01.94			wg normy
Podziałka 1:2.5	Nazwa Compressor				Nr rys. 601.27.902 601.27.906 601.27.907