




Suction capacity

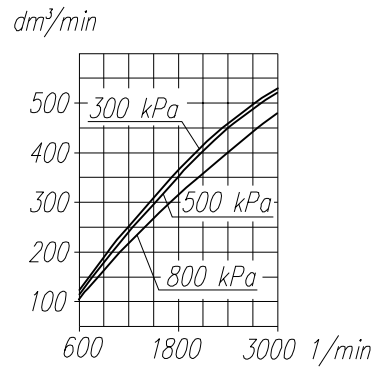


Power consumption

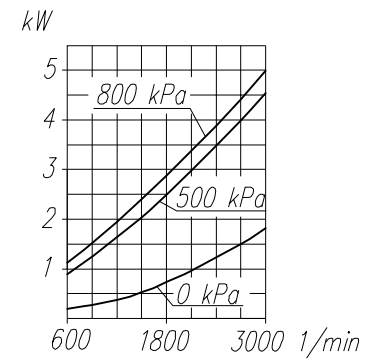

Time to fill a tank of 40dm³ capacity

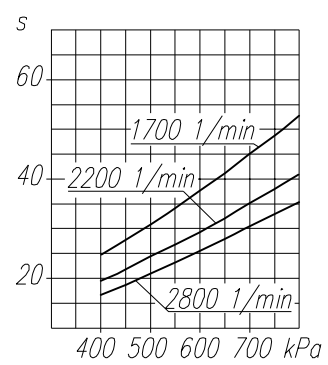

Max. r.p.m. for continuous duty

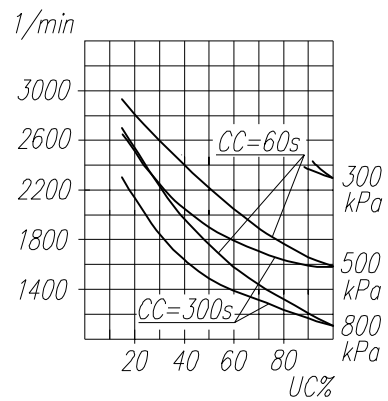


**TECHNICAL DATA:**

Number of cylinders 1  
 Cylinder diameter 90 mm  
 Piston stroke 46 mm  
 Total piston displacement 293 cm³  
 Mass 12.5 kg  
 Working pressure 800 kPa  
 Max. pressure for short time load 1000 kPa  
 Max. allowable temp. of compressed air +220 °C  
 Cooling by blow of air, with the speed of the flow min. 6 m/s  
 Lubrication: forced circulation, splash lubrication  
 min. pressure of oil 200 kPa

**SYMBOL DESCRIPTION:**

0 - suction end (thread M26x1.5 length 18 mm)  
 2 - discharge end (thread M26x1.5 length 18 mm)  
 81 - lubricating oil inlet (thread M10x1 length 10 mm)  
 82 - lubricating oil outlet and crankcase breathing  
 T - rating plate  
 \* - max. angular tilt of the compressor

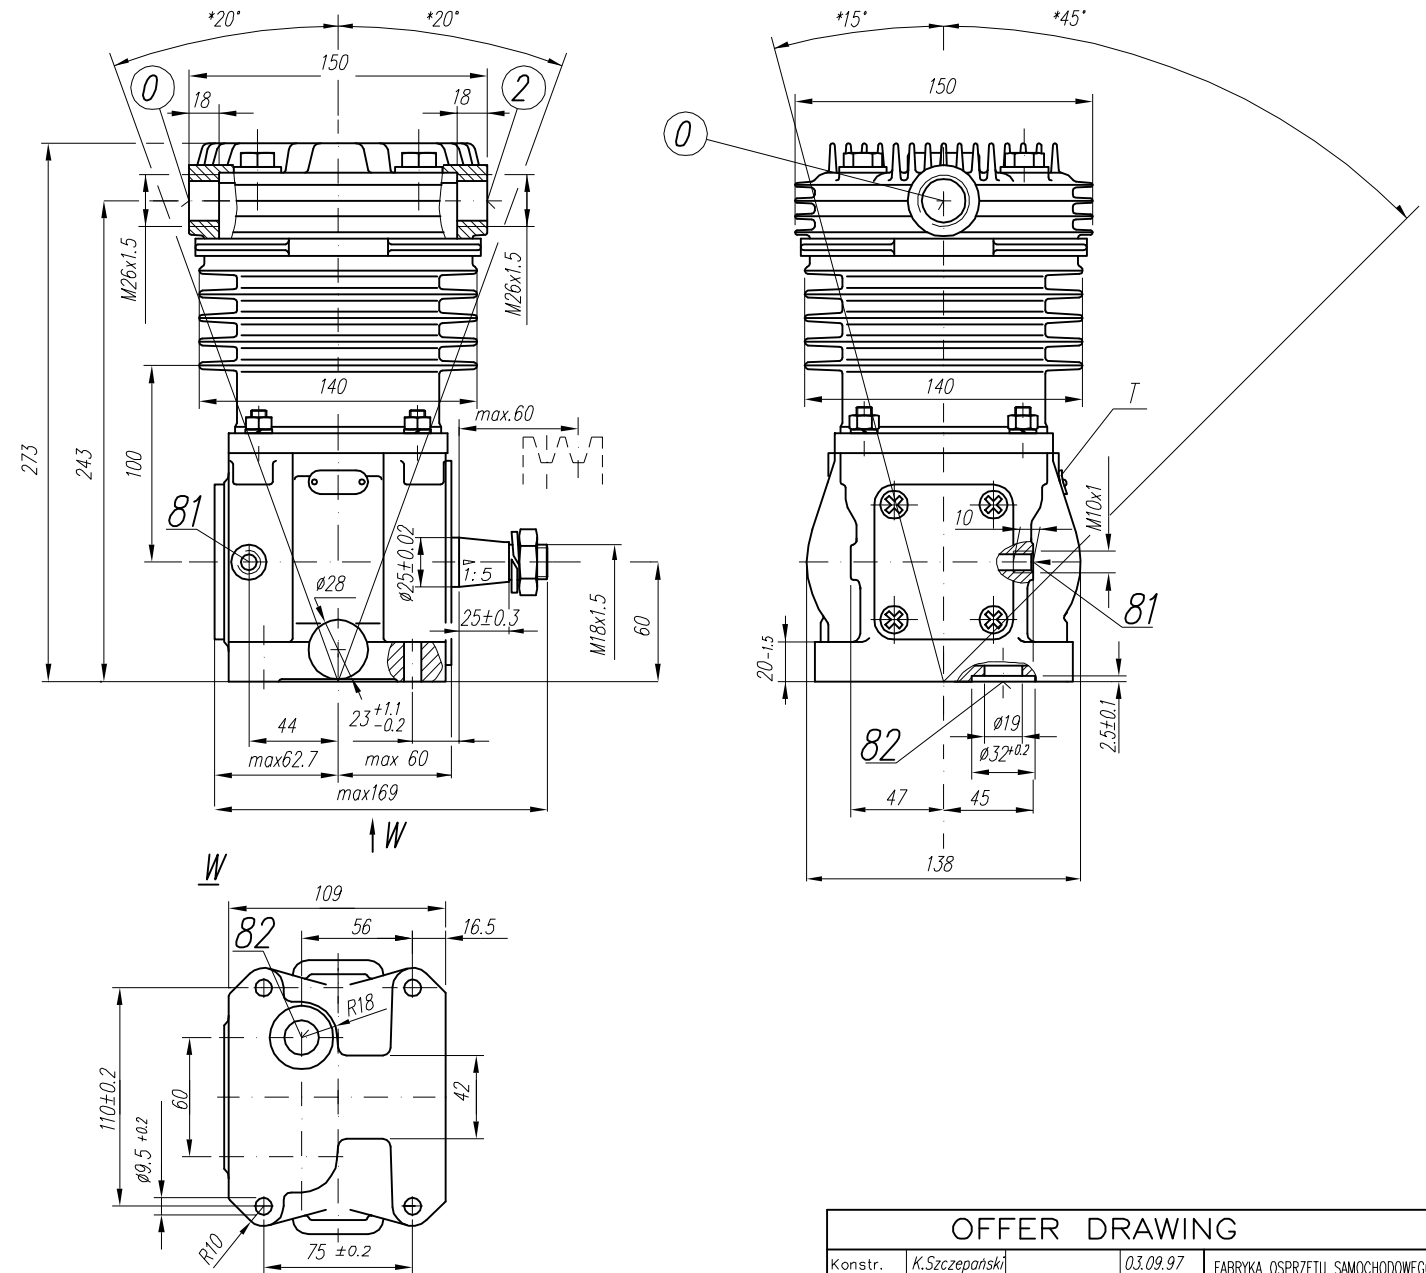

WABCO 411 143 805 0 411 043 800 0  
 Accuracy of the cone 1:5 ATα9 PN-77/M-02136

**NOTE!** The above characteristics are for open-inlet-valve control system at minimum cooling requirements and at ambient temperature +20°C

**DEFINITIONS:** CC=CT+CL - period of average operating cycle

$UC = \frac{CT}{CC} \times 100\%$  - percent ratio of compressor full load operating time in average operating cycle (also called percent duty cycle)

CL - compressor no-load operating time (exhaust to the atmosphere)

CT - compressor full load operating time

**OFFER DRAWING**

|             |               |                             |  |
|-------------|---------------|-----------------------------|--|
| Konstr.     | K.Szczepański | 03.09.97                    | FABRYKA OSPRZĘTU SAMOCHODOWEGO           |
| Normaliz.   | L. Baryna     |                             | POLMO-KÓDZ S.A.<br>FOS Dział Konstrukcji |
| Sprawdził   | W.Lesiak      |                             |  |
| Zatwierdził | B.Kleto       |                             |  |
| Podziałka   | Nazwa         | 1:2.5 Compressor 601.28.910 |  |