




Suction capacity

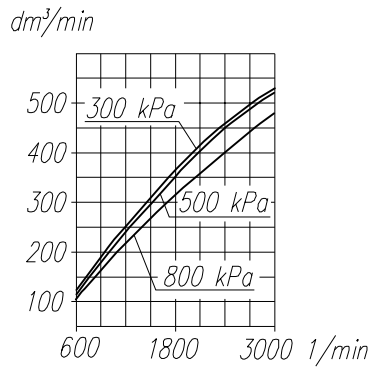


Power consumption

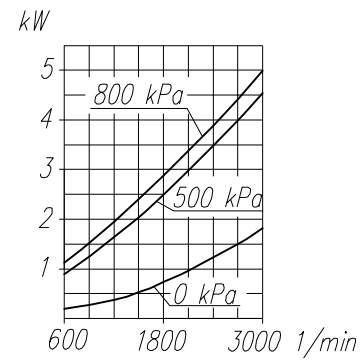

Time to fill a tank of 40dm³ capacity

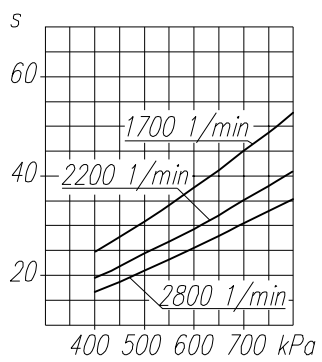

Max. r.p.m. for continuous duty

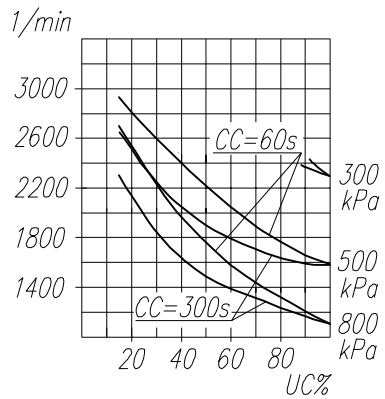

NOTE! The above characteristics are for open-inlet-valve control system at minimum cooling requirements and at ambient temperature +20°C

DEFINITIONS: CC=CT+CL - period of average operating cycle

$UC = \frac{CT}{CC} \times 100\%$ - percent ratio of compressor full load operating time in average operating cycle (also called percent duty cycle)

CL - compressor no-load operating time (exhaust to the atmosphere)

CT - compressor full load operating time

TECHNICAL DATA:


Number of cylinders 1
 Cylinder diameter 90 mm
 Piston stroke 46 mm
 Total piston displacement 293 cm³
 Mass 12.5 kg
 Working pressure 800 kPa
 Max. pressure short time duty 1000 kPa
 Max. allowable temp. of compressed air +220 °C
 Cooling by inflation of air, with the speed of the stream min. 6 m/s
 Lubrication forced circulation, splash lubrication
 min. pressure of oil 300±200 kPa
 (Es wird ein Öldruck von min. 60 kPa bei Leerlauf des heissen Motors zugelassen)

SYMBOL DESCRIPTION:

0 - suction end
 2 - discharge end
 81 - lubricating oil inlet
 82 - lubricating oil outlet and crankcase breathing

Digital marking according to International Standard ISO-6786

T - rating plate
 * - max. angular tilt of the compressor

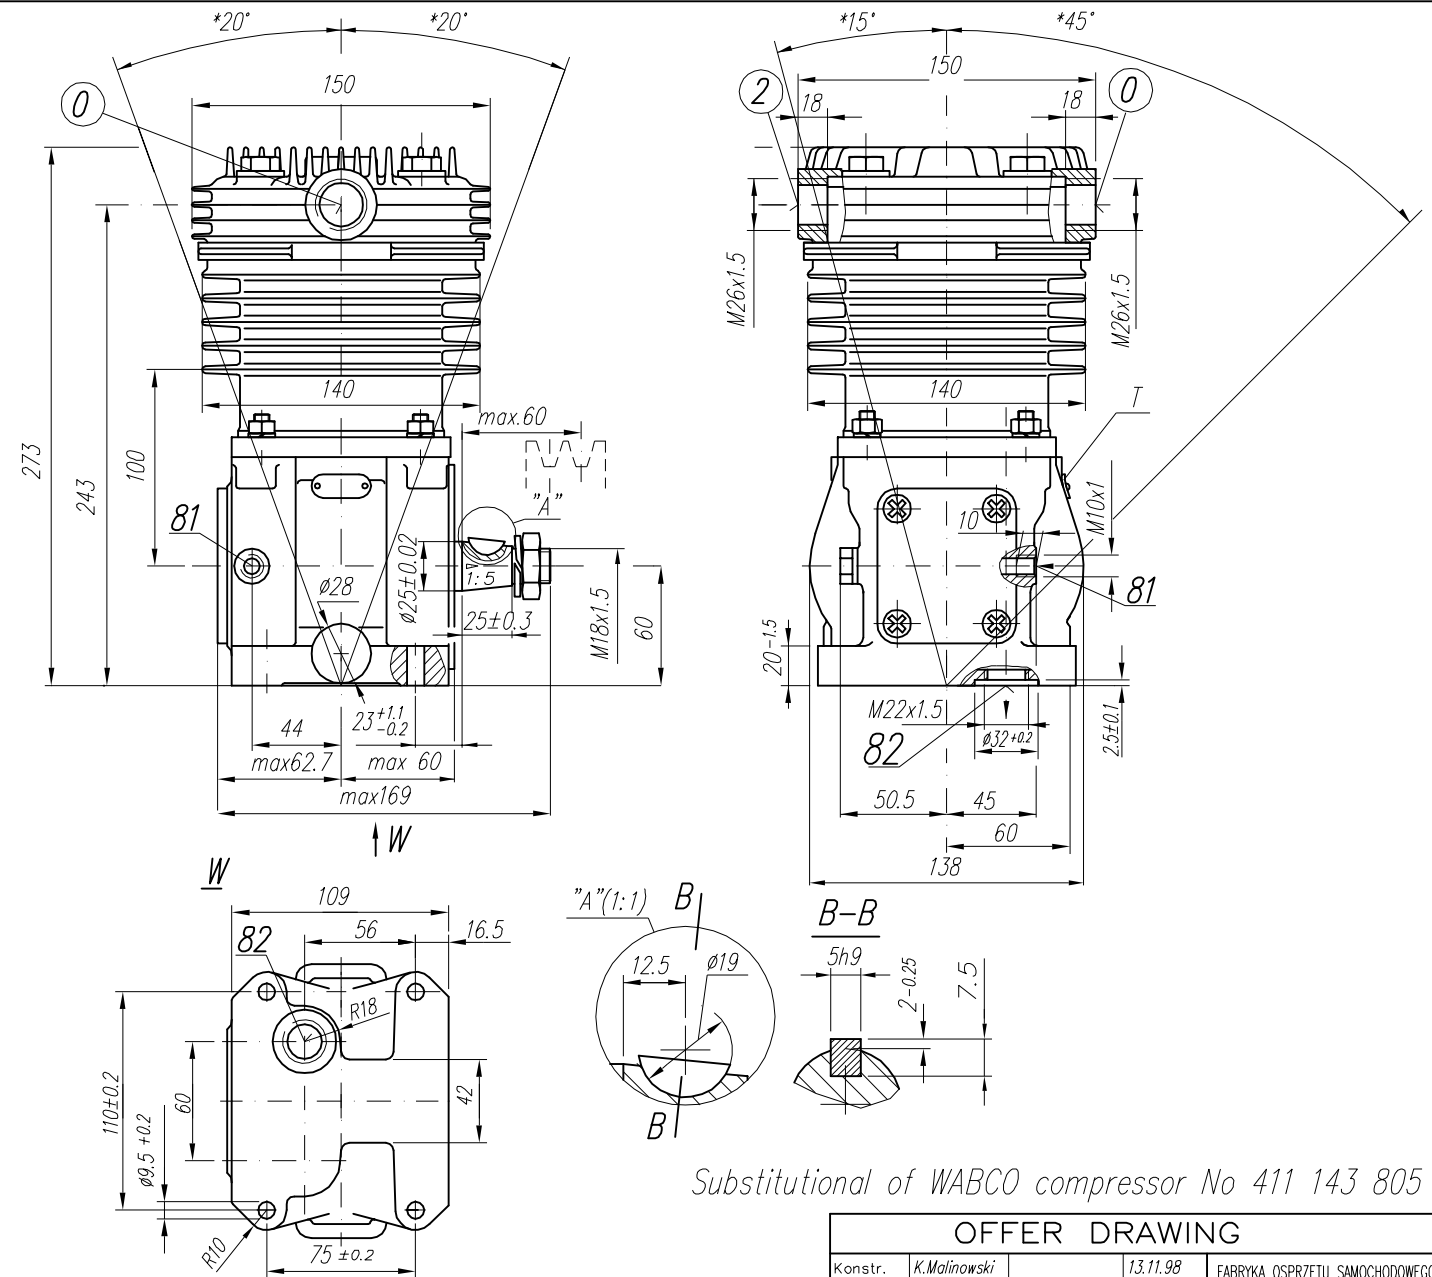

Accuracy of the cone 1:5 ATα10 PN-77/M-02136

Substitutional of WABCO compressor No 411 143 805

OFFER DRAWING			
Konstr.	K.Malinowski	13.11.98	FABRYKA OSPRZĘTU SAMOCHODOWEGO
Normaliz.	L. Baryna		POLMO-Łódź S.A.
Sprawdził	W.Lesiak		
Zatwierdził	W.Antkowiak		FOS Dział Konstrukcji
Podziałka	Nazwa		
1:1	Compressor	601.28.921	